

Unique Series


BRICKCOM SPECIAL & REMARKABLE






MD-H600Np-360 DN

6 Megapixel Surround Day & Night High Performance Mini-Dome Camera

- Sony Exmor 6MP Mini Dome Camera
- H.264 High Profile Video Compression Technology
- Support HDTV Video Quality
- Brickcom WDR Enhancement® Technology
- Built-in 180° Panoramic View and 360° Surrounding View
- DI/DO Supported
- 10 Meters IR range
- IK10 Vandal Proof and IP67 Weather Proof
- Built-in Micro SD/ SDHC / SDXC Memory Card Slot for Local Storage
- Removable IR-Cut Filter for Day and Night Function



Dimensions

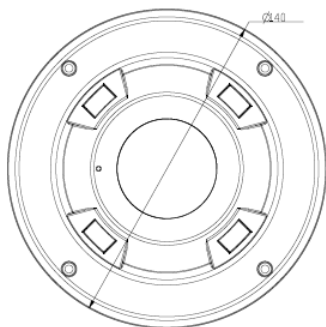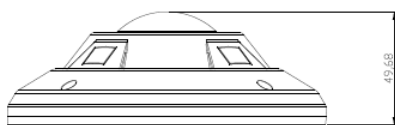

Traffic



Parking Lot





Retail





Industry

Camera	
Models	MD-H600np-360 DN
Hardware System	Flash: 32MB RAM: 512MB DDR
Image Sensor	Sensor Type : 1/1.8" Sony Exmor CMOS Sensor Sensor Resolution : 6MP (3096 x 2094)
Lens Spec	Lens Type: Board Lens Focal Length:1.05mm F=2.8 Iris: Fixed Iris View Angle:(H)182°±2°
Local Storage	Built-in Micro SD / SDHC / SDXC Max.128G Memory Card Slot
Day & Night ICR	Triggered by Light sensor, Scheduling, Digital Input
Minimum Illumination	0 Lux(IR On, B/W) 0.005 Lux(F1.6,B/W) 0.006Lux(F1.6,Color)
IR Illuminators	Built -In IR Illuminators Distance: 10 meters IR LED: 4 pcs
Video	
Compression Streaming	H.264 / MJPEG Simultaneous multiple streams
Video Setting	Multi-Profile Image Management: Day/ Night/ Sunset/ User 1/ User 2
S/N Ratio	Above 50 dB
Image Resolution	5.5MP (2720 x 2040) ● (15fps)
WDR	60 dB

Events and Alarm Management	
Events	Motion Detection/ Schedule/ Audio Detection/ Digital Input/ Temperature Alarm
Alarm	Stream/Snapshot to FTP/Email/Samba/SD-Card HTTP/Email Notification/ Digital Output
Audio	
Audio Streaming	2-way Audio Support
Audio Compression	G.711/AMR
Audio Input/ Output	Built-in MIC
General	
Communication	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
Power Input	DC12V* / DC24V* / DC48* (*)with PB-03 802.3af PoE
Temperature/ Environment	Operating Temperature: -40°C ~ 50°C (-40°F ~ 122°F) Start-up Temperature: -20°C ~ 50°C (-4°F ~ 122°F) Operating Humidity: 10% ~ 90%
Max. Power Consumption	6 watts
Dimension	140(L) X140(W) X 49.68(H) mm
Weight	460g/1.02lb
Housing	Weather-proof (IP67) Vandal-proof (IK10)
Certification	FCC/CE / IK10 / IP67
Viewing System Requirements	OS: Microsoft Windows 8.1/8/7/Vista/XP/2000 Browser: Mozilla Firefox, Internet Explorer 6/7 or above, Safari, Google Chrome Cell Phone: 3GPP player Real Player: 10.5 or above Quick Time: 6.6 or above VLC
Warranty	Limited 36 months warranty

Camera Accessories Options	
	L-WM-01 Camera Bracket
	CI-802A Camera Stand

Network Equipment Options	
	PS-588I V2 9 port 10/100M PoE Fast Ethernet Switch
	POE16U PoE Injector